

SAN Storage D4




At a Glance

- Superior Dependability
- High Efficiency
- Virtualization-compatible
- Linear Scalability


Overview

D4-30 SAN storage array delivers both high performance 8 Gbps Fibre Channel and cost-effective 10 Gbps iSCSI connectivity in one array with support for VMware®, databases, and other block-storage applications. Simultaneously use SAS and SATA drives in one enclosure to create dynamic, tiered storage.


Base Unit/Disk Enclosure (front)

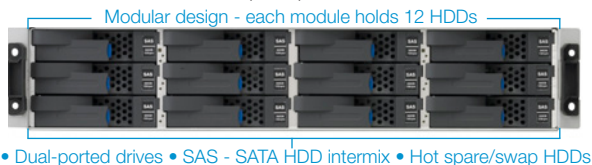


Base Unit with FC + iSCSI Option (rear)

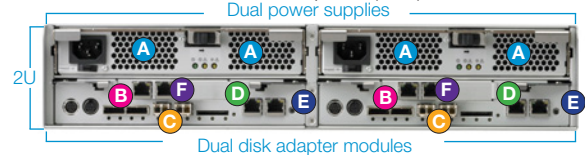

Base Unit with Extended FC Option (rear)

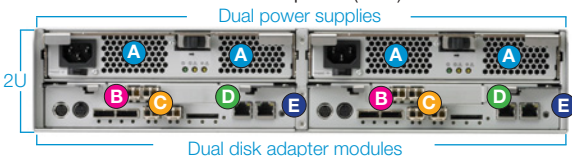

Disk Enclosure (rear)

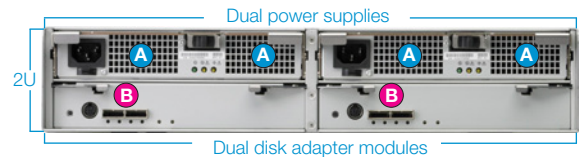

- Ⓐ Dual fans per power supply
- Ⓑ Dual SAS back-end ports (48 Gbps wide-link)
- Ⓒ Fibre Channel front-end connectivity
- Ⓓ Redundant management ports
- Ⓔ ECC cache memory (mirrored, battery-backed)
- Ⓕ iSCSI front-end connectivity

Solution

- **Fully redundant** system architecture delivers 99.999% availability
- **Active-active controllers** provide highest performance and dependability through multipathing
- **Snapshots and replication** enable robust data protection
- **Self-healing**, patented *Phoenix* technology decreases the number of RAID rebuilds by 30%-50% and reduces HDD failures by repairing hard drives before they fail
- **Eliminates silent data corruption** in disk drives that is not detected by other systems
- **RAID groups span enclosures** for maximum reliability
- **Global hot spares** and hot swappable hard drives
- **Mirrored ECC cache** is also battery-backed
- **Background disk & cache scrubbing** immunizes applications from receiving corrupt data
- **Thin Provisioning** enables smart capacity over-provisioning, keeping drive costs to a minimum
- **Dual FC and iSCSI** connectivity is the ideal vehicle for transitioning to IP-based storage infrastructure
- **SAS and SATA HDDs intermix** in the same enclosure to maximize cost-efficiency enabling economical storage of both primary and secondary data in the same array
- **Power off RAID groups** when not in use to reduce energy use
- **Expand RAID groups** dynamically by adding HDDs one at a time or in groups; data remains online and accessible
- **Up to 144 HDDs** in a single RAID group
- **Grow LUNs online** without reconfiguring RAID groups
- **8 front-end ports** to attach more servers without a switch
- **Up to 8 GB cache** maximizes performance for multiple hosts
- **Command Line Interface (CLI)** allows automated control
- **Email notification and SNMP traps** proactively alerts you
- **Browser-based GUI** allows remote management of up to 32 arrays in a 'single pane of glass'

Hardware Specifications

Model		D4 Basic Architecture	D4 with Extended FC Option	D4 with FC + iSCSI Option
Host Ports	8 Gbps Fibre Channel	4 ports (2 per controller)	8 ports (4 per controller)	4 ports (2 per controller)
	10 Gbps iSCSI	-	-	4 ports (2 per controller)
	iSCSI connection type	10GBASE-SR (multi-mode fiber compatible with OM3 cables)		
Number of Controllers		Dual controllers (active-active)		
Configuration		1 to 12 2U enclosures, 12 drives per enclosure, SAS – SATA intermix within an enclosure		
Cache Memory	Capacity	4 or 8 GB (2 or 4 GB per controller)	4 or 8 GB (2 or 4 GB per controller)	8 GB (4 GB per controller)
	Battery Backup Time	7 hours(8GB Cache Memory) 14 hours(4GB Cache Memory)		
	Optional BBU Time	72 hours(8GB Cache Memory) 120 hours(4GB Cache Memory)		
Supported RAID Levels	SAS	0,1, 10, Triple Mirror, 3, 3DP (3 Double Parity), 5, 50, 6		
	SATA	Triple Mirror, 5, 50, 6		
Maximum Capacity	SAS / SATA	86.4 TB / 288 TB		
Disk Drives	Capacity	SAS	300 GB, 450 GB, 600 GB rotating at 15,000 rpm 300 GB, 450 GB, 600 GB rotating at 10,000 rpm 1 TB, 2 TB rotating at 7,200 rpm(NearLine)	
		SATA	1 TB, 2 TB rotating at 7,200 rpm	
	Interface Speed	SAS / SATA	6 Gbps / 3 Gbps	
Solid State Drive		73 GB, 400 GB		
Number of Disk Drives		3 – 144		
Disk Enclosure Connections		48 Gbps wide-link SAS		
Supported Operating Systems		Microsoft® Windows Server® 2003* & 2008 (x86, x64), Hyper-V, Red Hat® Enterprise Linux®, VMware®, SolarisTM, Citrix® XenServer®		
Base Unit/Enclosure Dimensions		2U: 18.9" W x 21.3" D x 3.4" H (480 x 540 x 86.5 mm)		
Weight	Base Unit / Disk Enclosure	68.3 lbs. (31kg) or less / 63.9 lbs. (29kg) or less		
Power Requirements		AC 100 – 240V single phase 50/60Hz		

*iSCSI option does not support

Software Specifications

Objective	NEC Storage Software	Function
Simple Operation	StorageManager (ISM)	Core storage management functionality
	ThinProvisioning	Allows over-provisioning of capacity
High Availability	PathManager	Multi-pathing for failover and load balancing
Data Protection	DynamicDataReplication (DDR)	Data replication within same array
	RemoteDataReplication (RDR)*	Replication between arrays - synchronous, asynchronous, & semi-synch
	RemoteDataReplication Asynchronous*	Replication between arrays - asynchronous only
	DynamicSnapVolume (DSV)	On-demand snapshots
	ReplicationControl SQL Option	Transaction-consistent protection for MS SQL Server
Performance Management	PerformanceMonitor	Performance monitoring & alerts
	PerformanceNavigator	Analysis of performance data over time
	PerformanceOptimizer	Automates performance tuning
Energy Conservation	PowerConserver	Turn off HDDs when not needed
Compliance	VolumeProtector	Prevent unauthorized modification of data

*iSCSI option does not support

Environmental Specifications

	Maximum Watts		BTUs/Hour	
	All SAS	All SATA	All SAS	All SATA
D4 Base Unit	640 W	570 W	2,184 BTU/hr	1,945 BTU/hr
Disk Enclosure	430 W	370 W	1,462 BTU/hr	1,258 BTU/hr
Operating		Storage		
Temperature	41 - 104° F (5 - 40° C)		14 - 140° F (-10 - 60° C)	
Humidity	10 - 80%		5 - 80%	

Corporate Headquarters (Japan)

NEC Corporation
www.nec.com

Oceania (Australia)

NEC Australia Pty Ltd
www.nec.com.au

North America (USA & Canada)

NEC Corporation of America
www.necam.com

Asia

NEC Corporation
www.nec.com

Europe (EMEA)

NEC Philips Unified Solutions
www.nec-philips.com

About NEC Corporation of America Headquartered in Irving, Texas, NEC Corporation of America is a leading provider of innovative IT, network and communications products and solutions for service carriers, Fortune 1000 and SMB businesses across multiple vertical industries, including Healthcare, Government, Education and Hospitality. NEC Corporation of America delivers one of the industry's broadest portfolios of technology solutions and professional services, including unified communications, wireless, voice and data, managed services, server and storage infrastructure, optical network systems, microwave radio communications and biometric security. NEC Corporation of America is a wholly-owned subsidiary of NEC Corporation, a global technology leader with operations in 30 countries and more than \$42 billion in revenues. For more information, please visit www.necam.com.

XXXXXXXX | v.06.01.11

© 2011 NEC Corporation. All rights reserved. NEC, NEC logo, and UNIVERGE are trademarks or registered trademarks of NEC Corporation that may be registered in Japan and other jurisdictions. All trademarks identified with ® or ™ are registered trademarks or trademarks respectively. Models may vary for each country. Please refer to your local NEC representatives for further details.